


## TECHNICAL SPECIFICATION SHEET

### PFA Insulated Lead Wire

### UP TO 260 DEG C

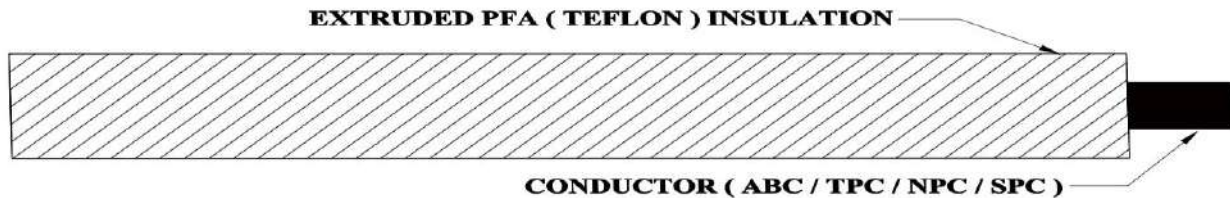

Single halogen-free cable



Temperature-resistant



Cold-resistant


### Technical Detail

Design Standard	: JSS 51034, IS 8130
Conductor	: Annealed Bare Copper / Tinned Plated Copper / Nickel Plated Copper / Silver Plated Copper
Conductor Type	: Solid wire / Flexible
No of Core	: Single Core
Conductor Size(Sqmm)	: As per customer requirements.
Insulation	: Extruded PFA ( Teflon ) Insulation
Core Identification	: As per customer requirements.
Cable Temperature Range	: Up to 260 Deg C
Voltage Grade	: 600/1100V

### Special Features

Max. Temp. Up to 260°C  
Uniform Diameter  
Smooth Surface  
Strong Bonding Between Insulation & Core Conductor  
Low Dielectric Constant  
Easy Stripping  
Can be Produce in Continuous Length

## TECHNICAL ( GA ) DRAWING

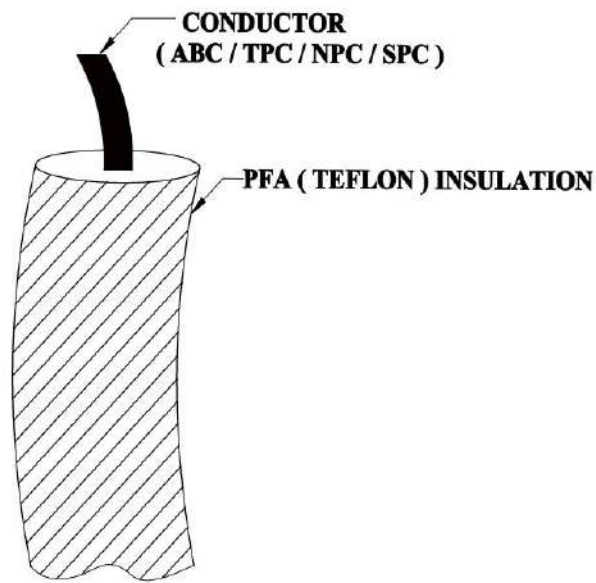

**SINGLE CORE CABLE**