


TECHNICAL SPECIFICATION SHEET

PVC Insulated Lead Wire

UP TO 105 DEG C

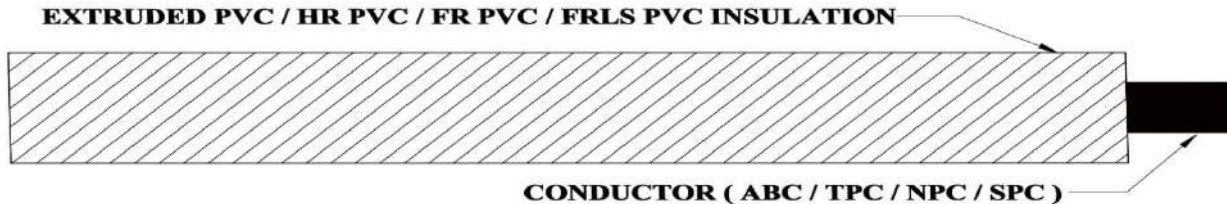

Single halogen-free cable



Temperature-resistant



Cold-resistant


Technical Detail

Design Standard	: IS 8130 ; IS 694
Conductor	: Annealed Bare Copper / Tinned Plated Copper / Nickel Plated Copper / Silver Plated Copper
Conductor Type	: Solid wire / Flexible
No of Core	: Single Core
Conductor Size(Sqmm)	: As per customer requirements.
Insulation	: Extruded PVC / HR PVC / FR PVC / FRLS PVC Insulation
Core Identification	: As per customer requirements.
Cable Temperature Range	: Up to 105 Deg C
Voltage Grade	: 600/1100V

Special Features

Max. Temp. Up to 105°C
Smooth Surface
Good Flexibility
Excellent resist to Oil, moist, fluids and chemicals
Excellent Di-electric Properties
High Temperature & Voltage Rating
Excellent Flame Retardant

TECHNICAL (GA) DRAWING

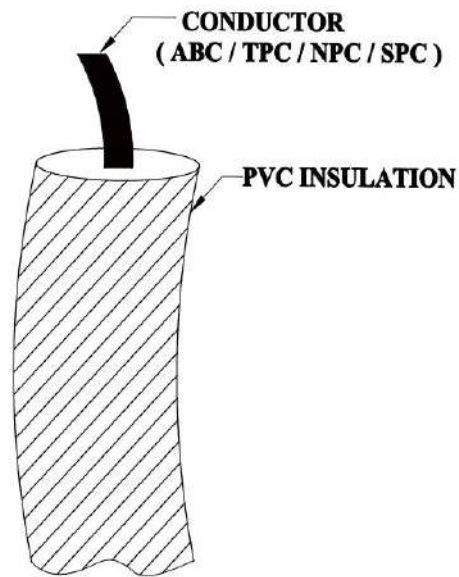

SINGLE CORE CABLE