


## TECHNICAL SPECIFICATION SHEET

### TEFLON Insulated Twisted Cable

### UP TO 260 DEG C

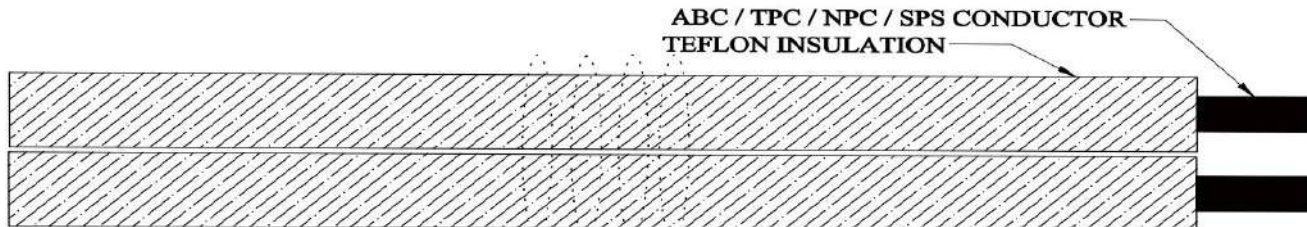

Single halogen-free cable



Temperature-resistant



Cold-resistant

### Technical Detail


Design Standard	: JSS 51034, IS 8130
Conductor	: Annealed Bare Copper / Tinned Plated Caopper / Nickel Plated Copper / Silver Plated Copper
Conductor Type	: Solid wire / Flexible
No of Core	: Two Core
Conductor Size ( Sqmm )	: As per customer requirements.
Insulation	: Wrapped & Sintered Teflon Insulation
Core Identification	: As per customer requirements.
Cable Temperature Range	: Up to 260 Deg C
Voltage Grade	: 600/1100V

### Special Features

Max. Temp. Up to 260°C  
Good Chemical Resistant  
Low Dielectric Constant  
Very Low dissipation factor  
High Temperature Resistant  
Good Abrasion Resistance  
Non-Flammability  
Passes JSS 51034 Flame Test

## TECHNICAL ( GA ) DRAWING

ABC / TPC / NPC / SPC CONDUCTOR

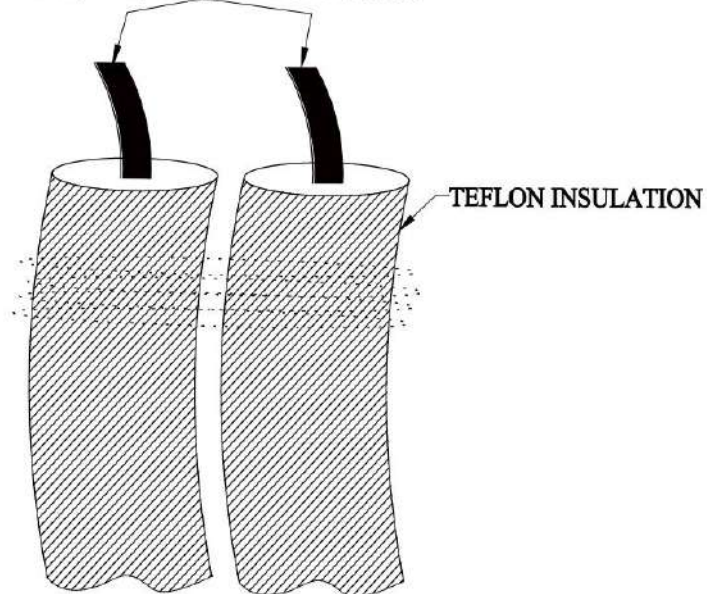

TWISTED CABLE