


TECHNICAL SPECIFICATION SHEET

SILICON Rubber Insulated Twisted Cable

UP TO 180 DEG C

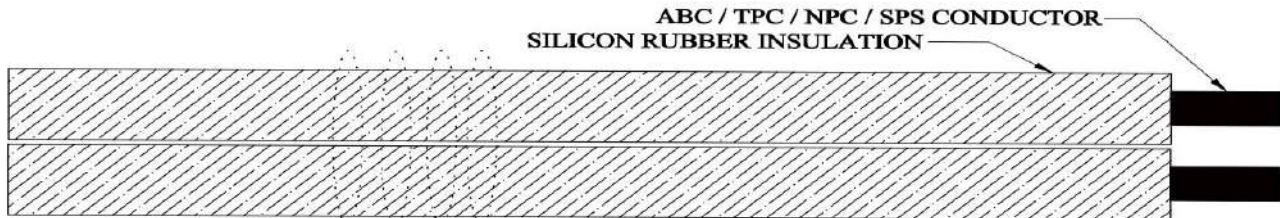

Single halogen-free cable



Temperature-resistant



Cold-resistant

Technical Detail


Design Standard	: IS 9968, IS 8130
Conductor	: Annealed Bare Copper / Tinned Plated Copper / Nickel Plated Copper / Silver Plated Copper
Conductor Type	: Solid wire / Flexible
No of Core	: Two Core
Conductor Size(Sqmm)	: As per customer requirements.
Insulation	: Extruded Silicon Rubber Insulation
Core Identification	: As per customer requirements.
Cable Temperature Range	: Up to 180 Deg C
Voltage Grade	: 600/1100V

Special Features

Max. Temp. Up to 180°C
Smooth Surface
Excellent Flexibility
Excellent resist to Oil, moist, fluids and chemicals
Excellent Di-electric Properties
High Temperature & Voltage Rating

TECHNICAL (GA) DRAWING

ABC / TPC / NPC / SPC CONDUCTOR

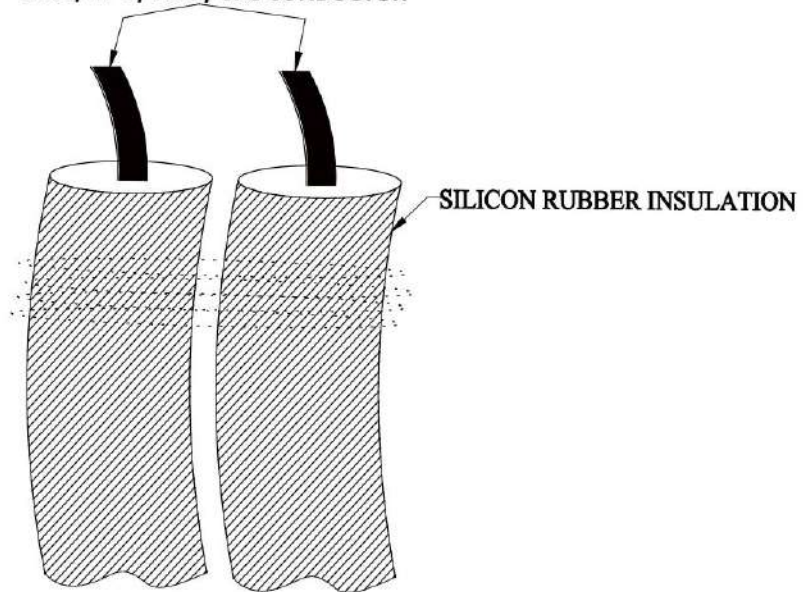

TWISTED CABLE