


## TECHNICAL SPECIFICATION SHEET

### VFG Insulated Twisted Cable

### UP TO 400 DEG C

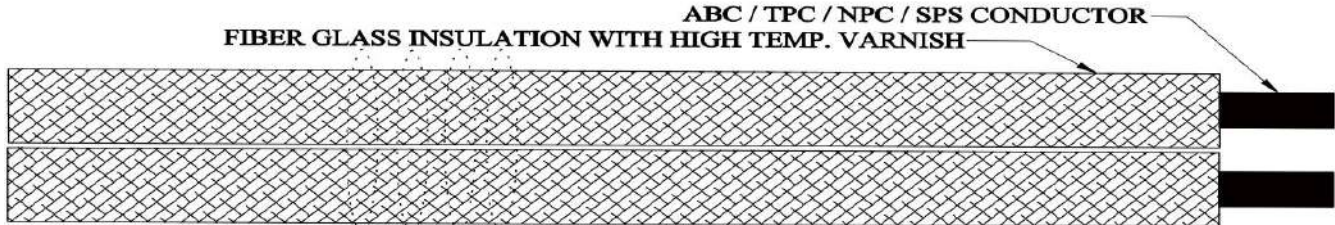

Single halogen-free cable



Temperature-resistant



Cold-resistant

### Technical Detail


<b>Design Standard</b>	: JSS 51037, IS 8130
<b>Conductor</b>	: Annealed Bare Copper / Tinned Plated Copper / Nickel Plated Copper / Silver Plated Copper
<b>Conductor Type</b>	: Solid wire / Flexible
<b>No of Core</b>	: Single Core
<b>Conductor Size(Sqmm)</b>	: As per customer requirements.
<b>Insulation</b>	: Varnish Fiber Glass Braiding
<b>Core Identification</b>	: Natural White
<b>Cable Temperature Range:</b>	Up to 400 Deg C
<b>Voltage Grade</b>	: 600/1100V

### Special Features

Max. Temp. Up to 400°C  
Excellent Abrasion Resistance  
Excellent Heat Resistivity  
Excellent resist to Oil, moist, fluids and chemicals  
Excellent Di-electric Properties  
High Temperature & Voltage Rating  
Excellent Flame Retardant

## TECHNICAL ( GA ) DRAWING

ABC / TPC / NPC / SPC CONDUCTOR

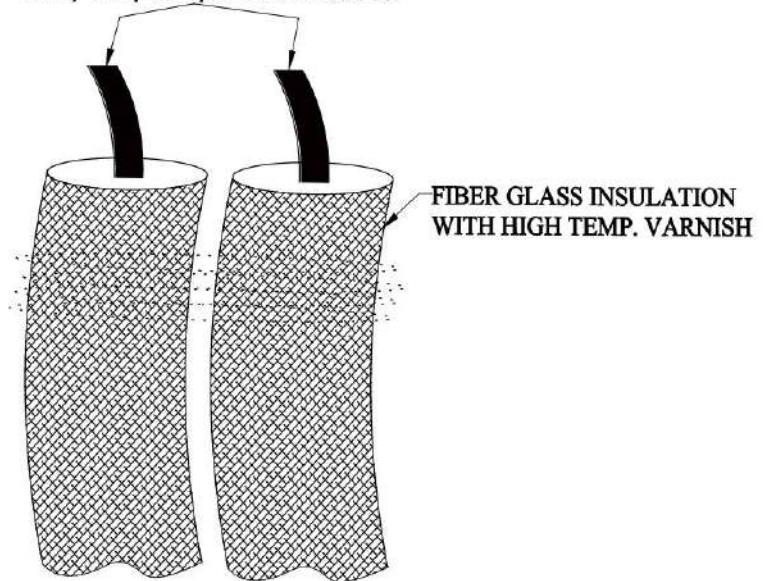

TWISTED CABLE