


GENERAL SPECIFICATION SHEET

PTFE-PTFE-ASBESTOS BRAIDING

UP TO 400 DEG C

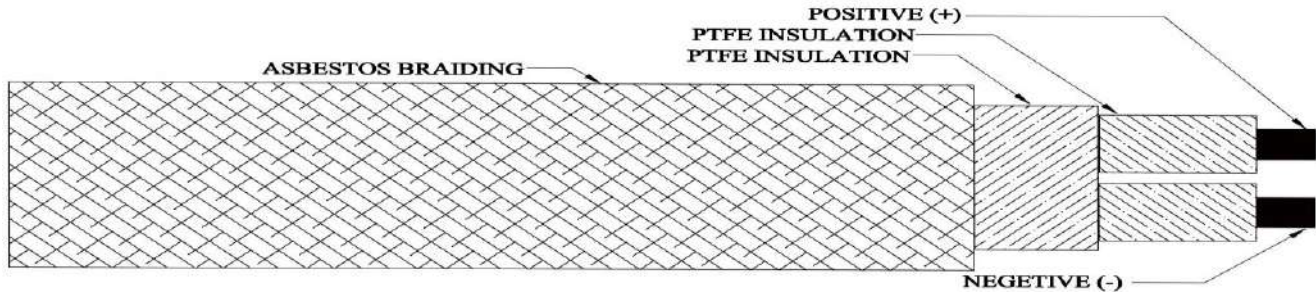

Cold-resistant



Single halogen-free cable



Temperature-resistant


Technical Detail

Design Standard	: As per JSS 51038, ANSI MC 96.1, IEC 60584.3, ASTM E230
Conductor	: KCA/KCB/KX/EX/NX/TX/JX/SC/RC
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Pair	: Single pair / Multi Pair
Core Insulation	: Wrapped & Sintered PTFE(Teflon) Insulation
Core Formation	: Twisted / Flat
Inner Sheath Insulation	: Wrapped & Sintered PTFE(Teflon) Insulation
Overall Braiding	: Asbestos Braiding
Core Colour	: As per Customer specification.
Outer Sheath Colour	: As per Customer specification.
Colour Code	: As per Customer specification.
Cable Temp. Range	: Up to 400 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 400°C
 Excellent Heat Resistant
 Outstanding Insulating Properties
 Good Thermal Stability
 Flame Retardant
 Good Abrasion Resistance
 Good Moisture Resistance
 Good Dielectric Strength
 Passes JSS 51034 Flame Test

TECHNICAL (GA) DRAWING

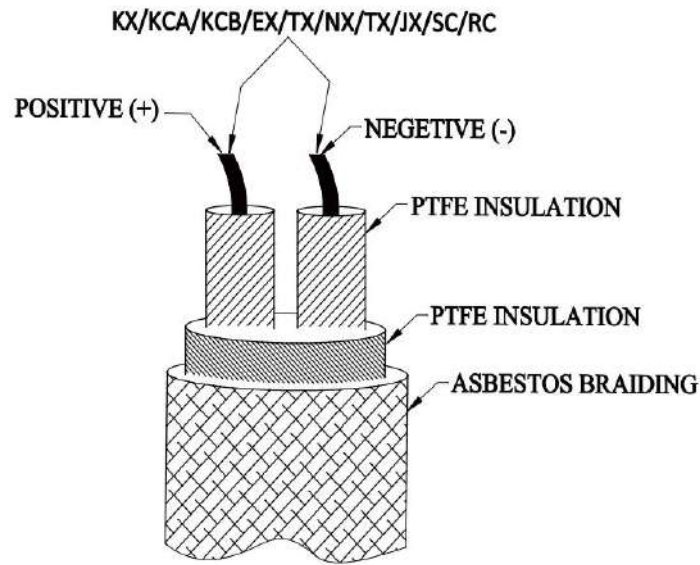

THERMOCOUPLE HEAT RESISTANCE CABLE