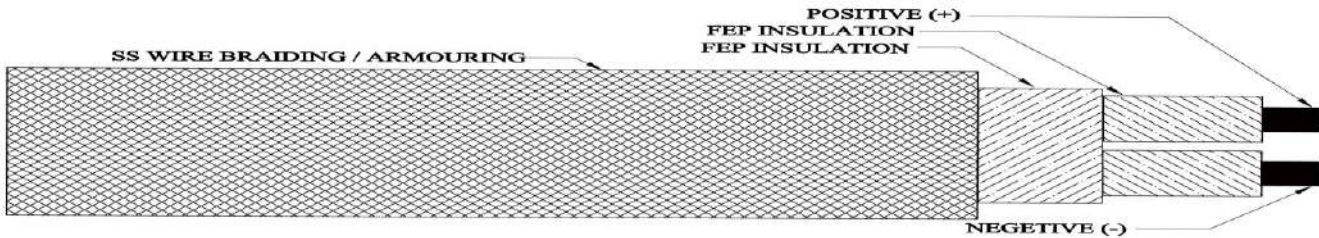


GENERAL SPECIFICATION SHEET

FEP-FEP-S.S. BRAIDING
UP TO 200 DEG C

Cold-resistant

Single halogen-free cable

Temperature-resistant


Technical Detail

Design Standard	: As per JSS 51038, ANSI MC 96.1, IEC 60584.3, ASTM E230
Conductor	: KCA/KCB/KX/EX/NX/TX/JX/SC/RC
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Pair	: Single pair / Multi Pair
Core Insulation	: Extruded FEP Insulated
Core Formation	: Twisted
Inner Sheath Insulation	: Extruded FEP Insulated
Overall Armouring	: Stainless Steel Wire Braiding / Armouring
Core Colour	: As per Customer specification.
Outer Sheath Colour	: As per Customer specification.
Colour Code	: As per Customer specification.
Cable Temp. Range	: Up to 200 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 200°C
Suitable for High Voltage Use
Low Dielectric Constant
Excellent Fire Retardant Property
Good Mechanical Strength
Good Moisture, Chemical Abrasion Resistance
Excellent Mechanical Strength

TECHNICAL (GA) DRAWING

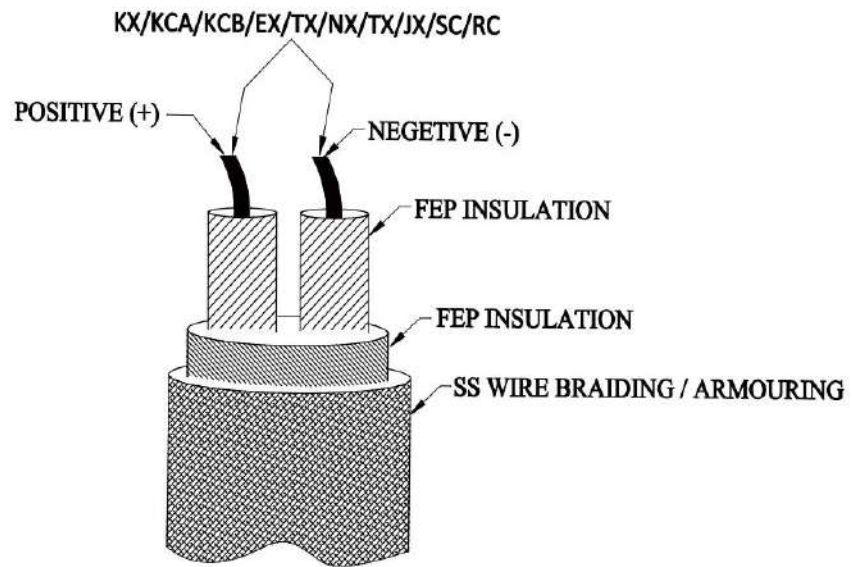

THERMOCOUPLE HIGH TEMPERATURE CABLE