


GENERAL SPECIFICATION SHEET

PTFE-AI-MYLER SCREENING-PTFE

UP TO 260 DEG C

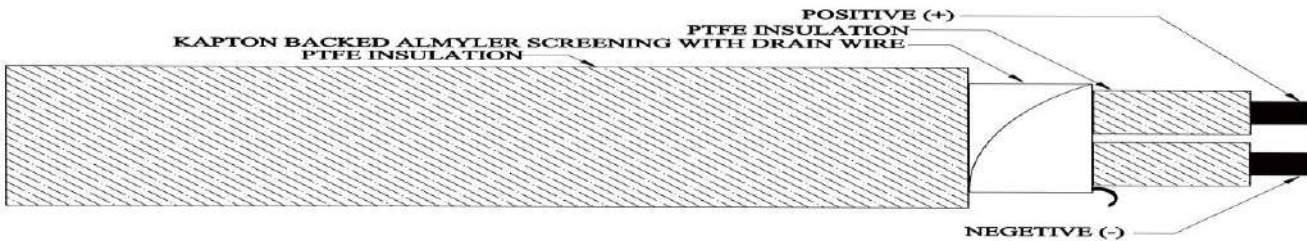

Cold-resistant



Single halogen-free cable



Temperature-resistant


Technical Detail

Design Standard	: As per JSS 51038, ANSI MC 96.1, IEC 60584.3, ASTM E230
Conductor	: KCA/KCB/KX/EX/NX/TX/JX/SC/RC
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Pair	: Single pair / Multi Pair
Core Insulation	: Wrapped & Sintered PTFE (Teflon) Insulation
Core Formation	: Twisted
Screening	: Kapton Backed Al-Myler Screening With (0.50 Sqmm) ATC Drain Wire
Outer Sheath Insulation	: Wrapped & Sintered PTFE (Teflon) Insulation
Core Colour	: As per Customer specification.
Outer Sheath Colour	: As per Customer specification.
Colour Code	: As per Customer specification.
Cable Temp. Range	: Up to 260 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 260°C
 Excellent Heat Resistant
 Outstanding Insulating Properties
 Good Thermal Stability
 Flame Retardant
 Passes JSS 51034 Flame Test
 Good Abrasion Resistance
 Excellent Resist to Electro Magnetic Inter Ferece

TECHNICAL (GA) DRAWING

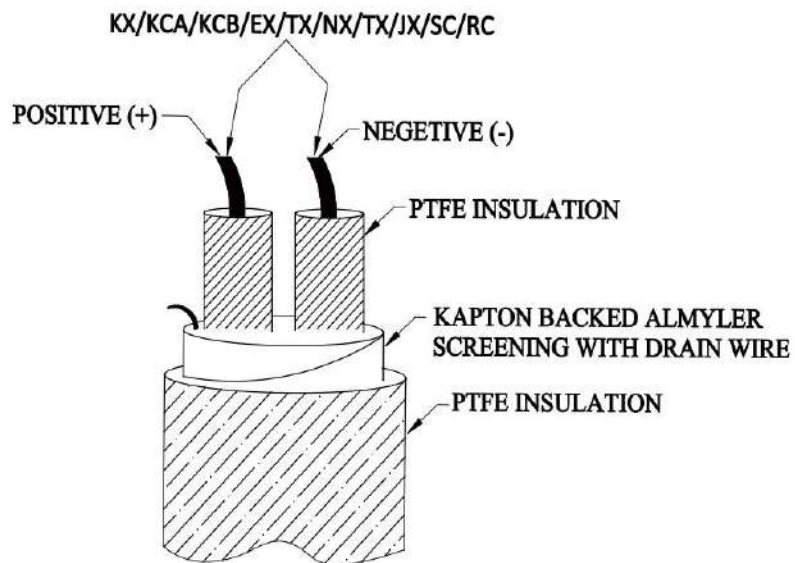

THERMOCOUPLE HIGH TEMPERATURE CABLE