


GENERAL SPECIFICATION SHEET

PFA – SILICON RUBBER
UP TO 200 DEG C


Cold-resistant

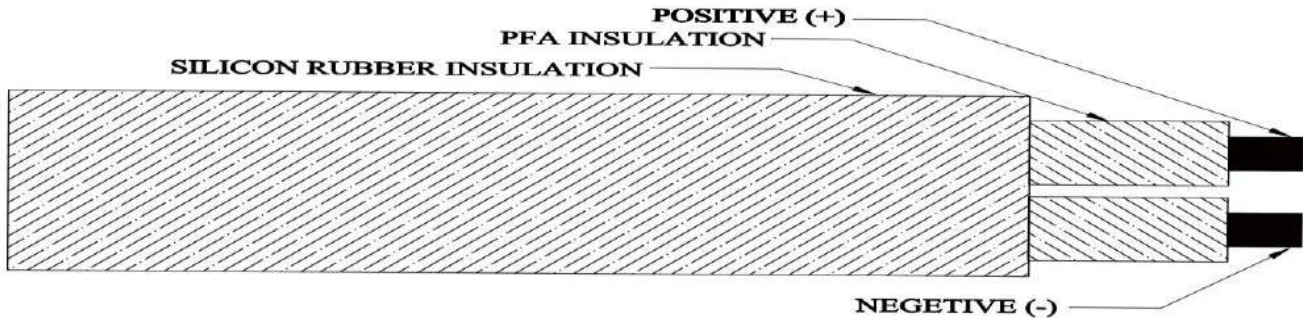

Single halogen-free cable



Temperature-resistant


Technical Detail

Design Standard	: As per JSS 51038, ANSI MC 96.1, IEC 60584.3, ASTM E230
Conductor	: KCA/KCB/KX/EX/NX/TX/JX/SC/RC
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Pair	: Single pair / Multi Pair
Core Insulation	: Extruded PFA Insulated
Core Formation	: Twisted / Flat
Outer Sheath Insulation	: Silicon Rubber Insulation
Core Colour	: As per Customer specification.
Outer Sheath Colour	: As per Customer specification.
Colour Code	: As per Customer specification.
Cable Temp. Range	: Up to 200 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 200°C
 Excellent Heat Resistant
 Outstanding Insulating Properties
 Good Thermal Stability
 Flame Retardant
 Passes JSS 51034 Flame Test

TECHNICAL (GA) DRAWING

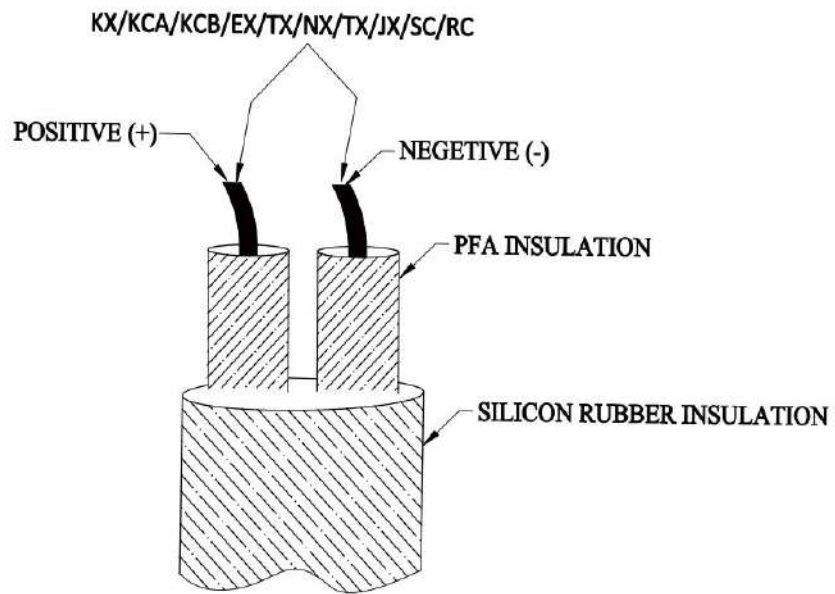

THERMOCOUPLE HIGH TEMPERATURE CABLE