


GENERAL SPECIFICATION SHEET

PTFE – SILICON RUBBER

UP TO 200 DEG C

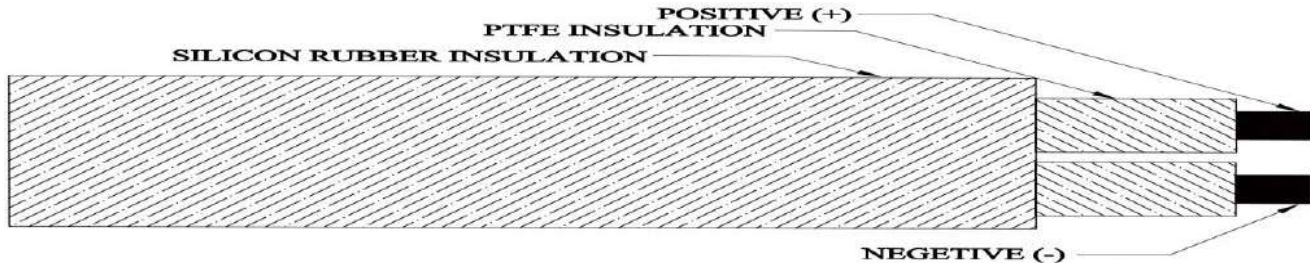

Cold-resistant



Single halogen-free cable



Temperature-resistant


Technical Detail

| | |
|--------------------------------|--|
| Design Standard | : As per JSS 51038, ANSI MC 96.1, IEC 60584.3, ASTM E230 |
| Conductor | : KCA/KCB/KX/EX/NX/TX/JX/SC/RC |
| Conductor Size | : Variant as per customer specifications |
| Conductor Type | : Solid wire / Flexible |
| No of Pair | : Single pair / Multi Pair |
| Core Insulation | : Wrapped & Sintered PTFE(Teflon) Insulation |
| Core Formation | : Twisted / Flat |
| Outer Sheath Insulation | : Silicon Rubber Insulation |
| Core Colour | : As per Customer specification. |
| Outer Sheath Colour | : As per Customer specification. |
| Colour Code | : As per Customer specification. |
| Cable Temp. Range | : Up to 200 Deg C |
| Voltage Grade | : Upto 1100 V |

Special Features

Max. Temp. upto 200°C
 Excellent Heat Resistant
 Outstanding Insulating Properties
 Good Thermal Stability
 Flame Retardant
 Passes JSS 51034 Flame Test

TECHNICAL (GA) DRAWING

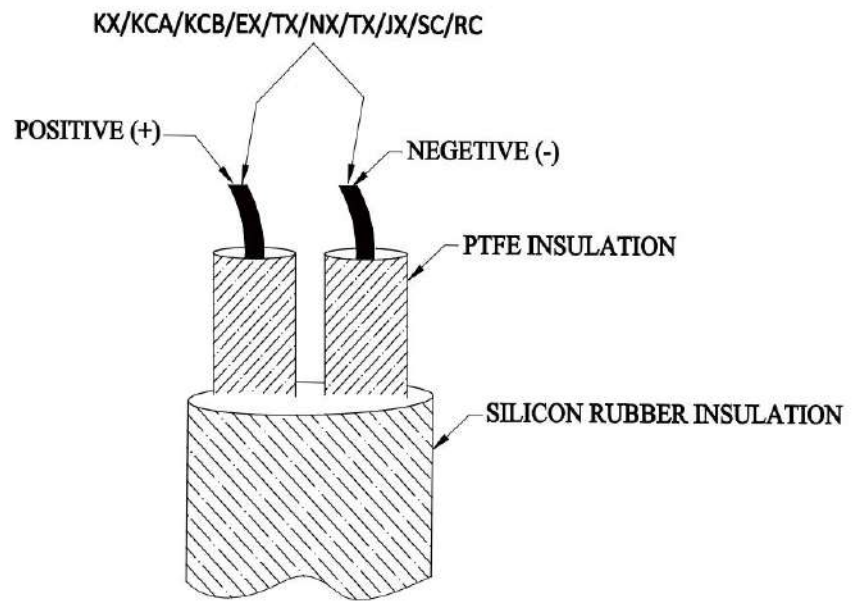

THERMOCOUPLE HIGH TEMPERATURE CABLE