


TECHNICAL SPECIFICATION SHEET

PTFE-VFG Insulated Lead Wire

UP TO 400 DEG C

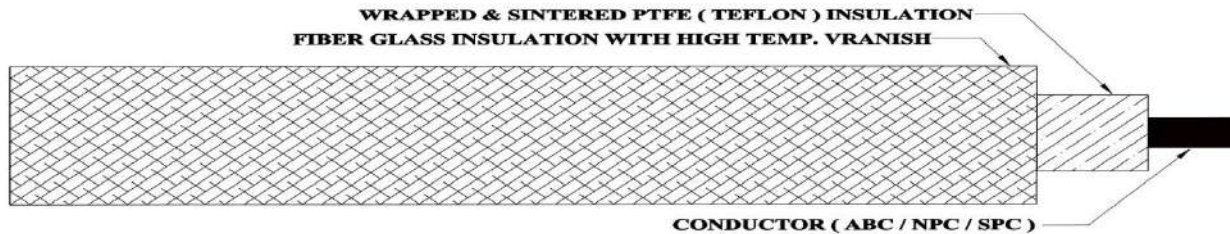

Single halogen-free cable



Temperature-resistant



Cold-resistant


Technical Detail

Design Standard	: JSS 51034, IS 8130
Conductor	: Annealed Bare Copper /Nickel Plated Copper/Silver Plated Copper
Conductor Type	: Solid wire / Flexible
No of Core	: Single Core
Conductor Size(Sqmm)	: As per customer requirements.
Insulation	: Wrapped & Sintered PTFE With Varnish Fiber Glass Braiding
Core Identification	: As per customer requirements.
Cable Temperature Range:	Up to 400 Deg C
Voltage Grade	: 600/1100V

Special Features

Max. Temp. Up to 400°C
Excellent Abrasion Resistance
Excellent Heat Resistivity
Excellent resist to Oil, moist, fluids and chemicals
Excellent Di-electric Properties
High Temperature & Voltage Rating
Excellent Flame Retardant

TECHNICAL (GA) DRAWING

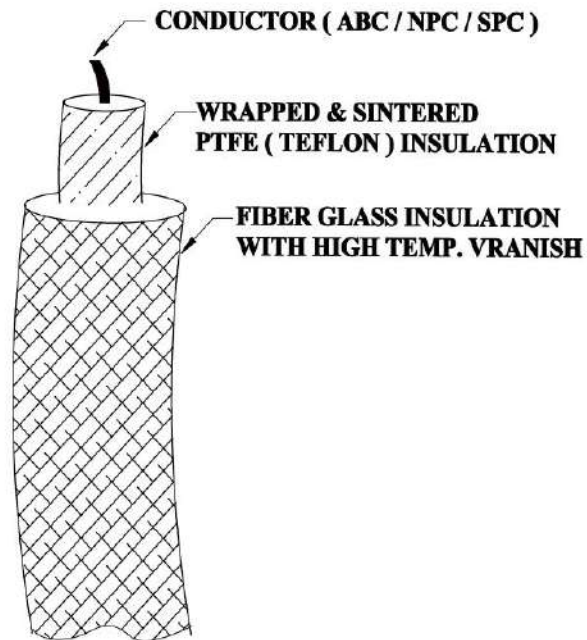

SINGLE CORE CABLE