


## TECHNICAL SPECIFICATION SHEET

### **SILICON Rubber -VFG Insulated Lead Wire UP TO 200 DEG C**



Single halogen-free cable

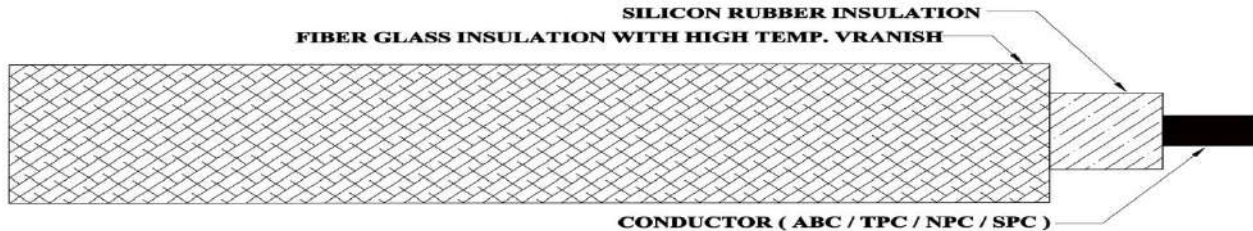

Temperature-resistant



Cold-resistant


### Technical Detail

|                                 |  |
|---------------------------------|--|
| <b>Design Standard</b>          | : JSS 51037, IS 8130, IS 9968  |
| <b>Conductor</b>                | : Annealed Bare Copper / Tinned Plated Copper /<br>Nickel Plated Copper / Silver Plated Copper |
| <b>Conductor Type</b>           | : Solid wire / Flexible  |
| <b>No of Core</b>               | : Single Core  |
| <b>Conductor Size(Sqmm)</b>     | : As per customer requirements.  |
| <b>Insulation</b>               | : Silicon Rubber With Varnish Fiber Glass Braiding   |
| <b>Core Identification</b>      | : As per customer requirements.  |
| <b>Cable Temperature Range:</b> | Up to 200 Deg C  |
| <b>Voltage Grade</b>            | : 600/1100V  |

### Special Features

Max. Temp. Up to 200°C  
Smooth Surface  
Excellent Flexibility  
Excellent resist to Oil, moist, fluids and chemicals  
Excellent Di-electric Properties  
High Temperature & Voltage Rating

## TECHNICAL ( GA ) DRAWING

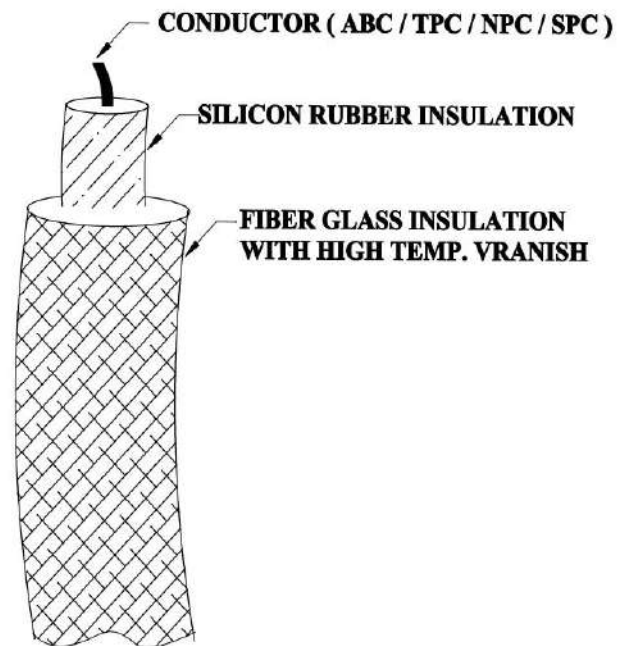

**SINGLE CORE CABLE**