


GENERAL SPECIFICATION SHEET

PTFE/FEP-POLYIMIDE-SPC

UP TO 260 DEG C

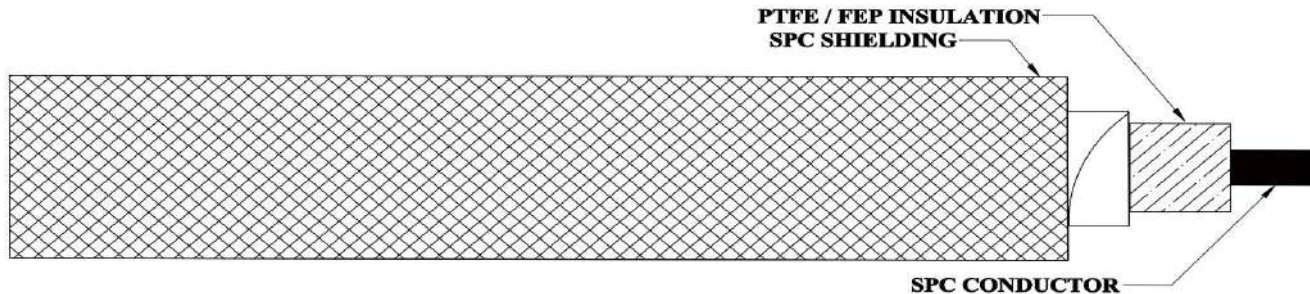

Cold-resistant



Single halogen-free cable



Temperature-resistant

Technical Detail

Design Standard	: As per IS 8130, JSS 51034
Conductor	: Annealed Silver Plated Copper Conductor
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Core	: Single Core
Core Insulation	: Extruded PTFE/FEP Insulation
Binder	: Polyimide Tapping
Overall Shielding	: SPC Wire Shielding.
Core Colour	: As per Customer specification.
Outer Sheath Colour	: As per Customer specification.
Cable Temp. Range	: Up to Upto 260 Deg.C.
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 260°C
 Excellent Physical Properties
 Excellent Di-Electric constant
 Excellent Flame Retardant Property
 Good Heat Resistivity
 High Thermal Endurance
 Good Moisture, Chemical Abrasion Resistance

TECHNICAL (GA) DRAWING