


## GENERAL SPECIFICATION SHEET

### PE-FOIL-AL ALLOY BRAIDING-PVC-GI ARM-PVC UP TO 105 DEG C



Cold-resistant

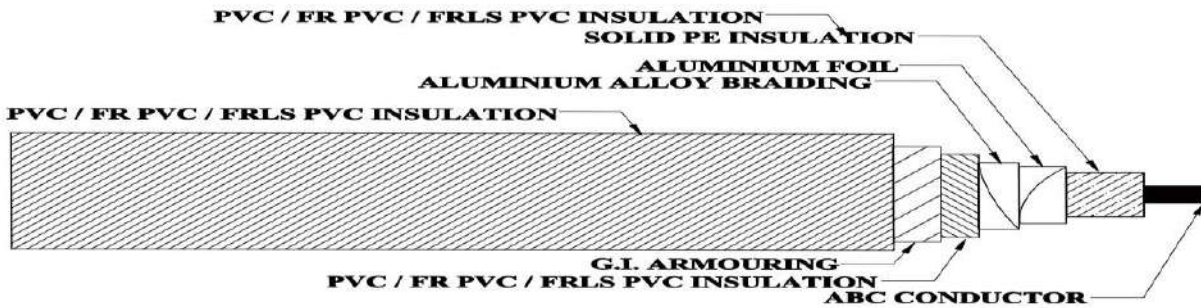

Single halogen-free cable




Temperature-resistant

### Technical Detail

<b>Design Standard</b>	: As per IS 8130, IS 694 ; IS 5831:84
<b>Conductor</b>	: Annealed Bare Copper Conductor
<b>Conductor Size</b>	: Variant as per customer specifications
<b>Conductor Type</b>	: Solid wire / Flexible
<b>No of Core</b>	: Single Core
<b>Core Insulation</b>	: Extruded Solid PE Insulation
<b>Binder</b>	: Aluminium Foil Tapping
<b>Braiding</b>	: Aluminium Alloy Braiding
<b>Inner Shaeth Insulation</b>	: PVC / FR PVC / FRLS PVC Insulation
<b>Armouring</b>	: G.I. Wire Armouring
<b>Outer Shaeth Insulation</b>	: PVC / FR PVC / FRLS PVC Insulation
<b>Core Colour</b>	: As per Customer specification.
<b>Outer Sheath Colour</b>	: As per Customer specification.
<b>Cable Temp. Range</b>	: Up to Upto 105 Deg.C.
<b>Voltage Grade</b>	: Upto 1100 V

### Special Features

Max. Temp. upto 260°C  
Excellent Physical Properties  
Excellent Di-Electric constant  
Excellent Flame Retardant Property  
Good Heat Resistivity  
High Thermal Endurance  
Good Moisture, Chemical Abrasion Resistance

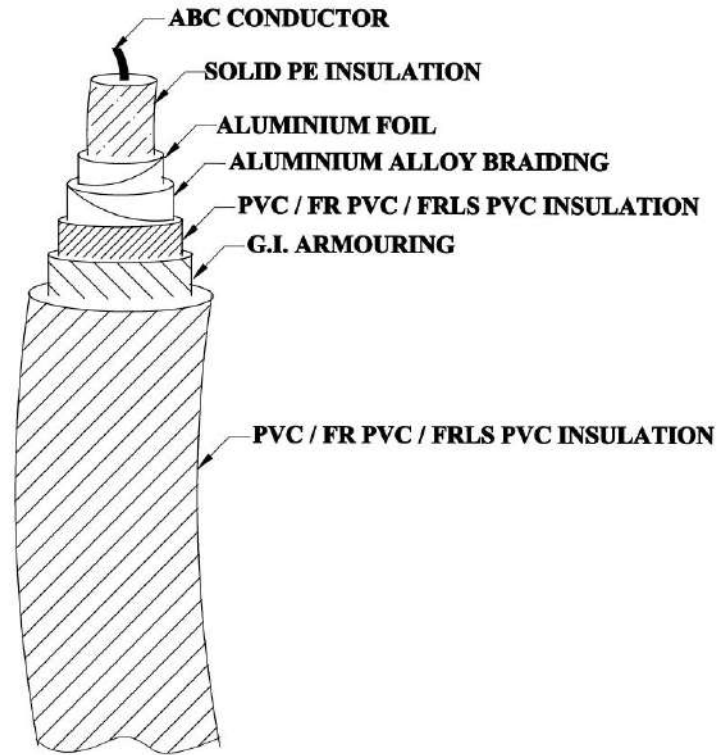**TECHNICAL ( GA ) DRAWING****RG 11/U ARMoured CABLE**