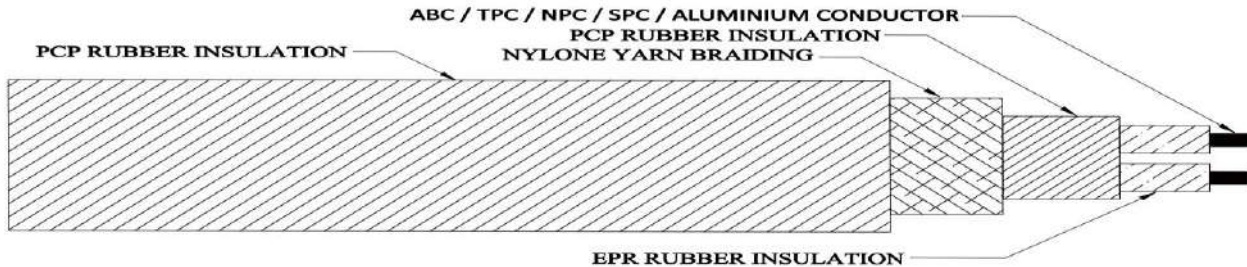


GENERAL SPECIFICATION SHEET

EPR-PCP-NYLONE BRAIDING-PCP HD HOFR
UP TO 90 DEG C

Cold-resistant

Single halogen-free cable

Temperature-resistant

Technical Detail


Design Standard	: As per IS 8130, IS 9968, IS 6380
Conductor	: Annealed Bare Copper / Nickel Plated Copper / Tinned Plated Copper / Silver Plated Copper
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Core	: Single Core / Multi Core
Core Insulation	: EPR Insulation
Core Formation	: Twisted / Flat
Inner Sheath Insulation	: PCP Insulation
Braiding	: Nylone Yarn Braiding
Outer Sheath Insulation	: PCP HD HOFR Insulation
Core Colour	: As per Customer specification.
Outer Sheath Colour	: As per Customer specification..
Cable Temp. Range	: Up to 90 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 90°C
 Excellent Heat Resistant
 Outstanding Insulating Properties
 Good Thermal Stability
 Excellent Resistance to Ozone & Corona Effect
 Easier Solder Termination
 Good Moisture, Chemical Abrasion Resistance

TECHNICAL (GA) DRAWING

ABC / TPC / NPC / SPC / ALUMINIUM CONDUCTOR

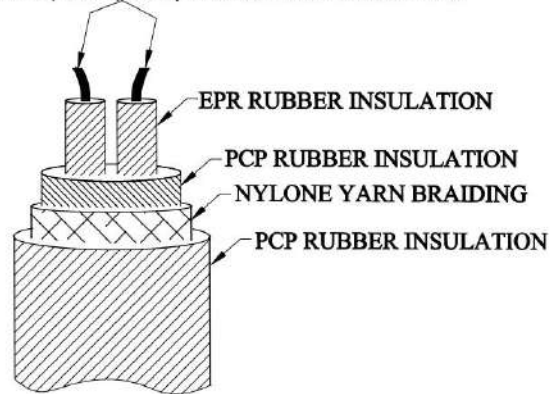**TUFF RUBBER CABLE**