


GENERAL SPECIFICATION SHEET

PTFE-PTFE-FG-SS BRAIDING

UP TO 400 DEG C

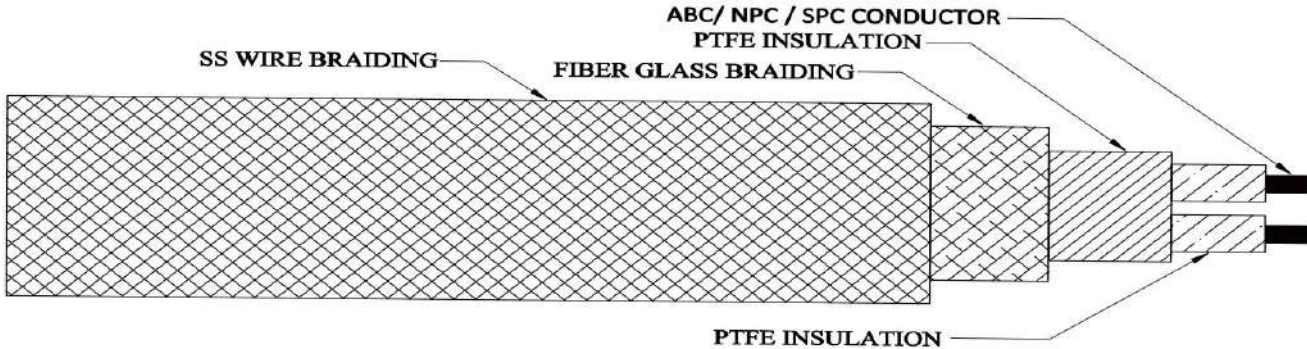

Cold-resistant



Single halogen-free cable



Temperature-resistant

Technical Detail


Design Standard	: As per JSS 51034, IS 8130
Conductor	: Annealed Bare Copper / Nickel Plated Copper / Silver Plated Copper
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Core	: Single Core / Multi Core
Core Insulation	: Wrapped & Sintered PTFE(Teflon) Insulation
Core Formation	: Twisted / Flat
Inner Sheath Insulation	: Wrapped & Sintered PTFE(Teflon) Insulation
Overall Braiding	: Fiber Glass Insulation with High Temp.Varnish
Armouring	: Stainless Steel Wire Braiding / Armouring
Core Colour	: As per Customer specification.
Outer Sheath Colour	: As per Customer specification.
Cable Temp. Range	: Up to 400 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 400°C
 Excellent Heat Resistant
 Outstanding Insulating Properties
 Good Thermal Stability
 Flame Retardant
 Good Abrasion Resistance
 Good Dielectric Strength
 Passes JSS 51034 Flame Test

TECHNICAL (GA) DRAWING

ABC/ NPC / SPC CONDUCTOR

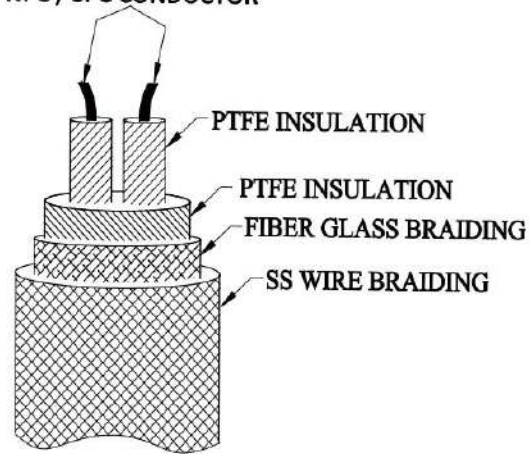**HIGH TEMPERATURE CABLE**