


## GENERAL SPECIFICATION SHEET

**PTFE-PTFE****UP TO 260 DEG C**AWG 24, SOLID, SINGLE STRAND, ANNEALED BARE COPPER CONDUCTOR  
PTFE INSULATION

Cold-resistant

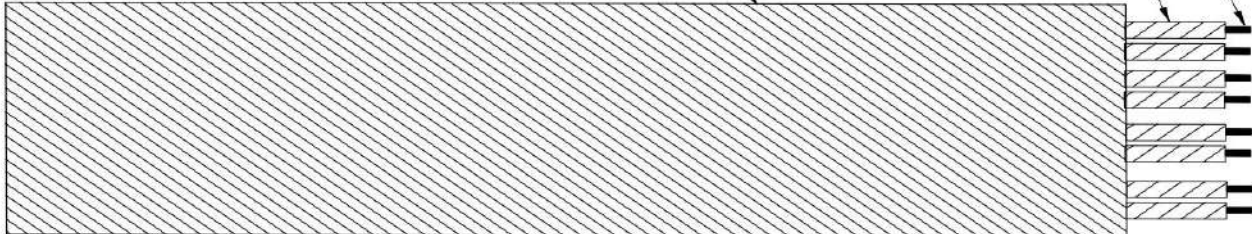

Single halogen-free cable



Temperature-resistant

### Technical Detail


<b>Design Standard</b>	: As per JSS 51034, IS 8130
<b>Conductor</b>	: Annealed Bare Copper
<b>Conductor Size</b>	: AWG 24
<b>Conductor Type</b>	: Solid wire
<b>No of Pair</b>	: 4 Pair
<b>Core Insulation</b>	: Wrapped & Sintered PTFE( Teflon ) Insulation
<b>Core Formation</b>	: Twisted
<b>Outer Sheath Insulation</b>	: Wrapped & Sintered PTFE( Teflon ) Insulation
<b>Core Colour</b>	: As per Standard
<b>Outer Sheath Colour</b>	: As per Standard
<b>Cable Temp. Range</b>	: Up to 260 Deg C
<b>Voltage Grade</b>	: Upto 1100 V

### **Special Features**

Max. Temp. upto 260°C  
Excellent Heat Resistant  
Outstanding Insulating Properties  
Good Thermal Stability  
Flame Retardant  
Excellent Mechanical Strength  
Passes JSS 51034 Flame Test

**TECHNICAL ( GA ) DRAWING**

AWG 24, SOLID, SINGLE STRAND, ANNEALED BARE COPPER CONDUCTOR

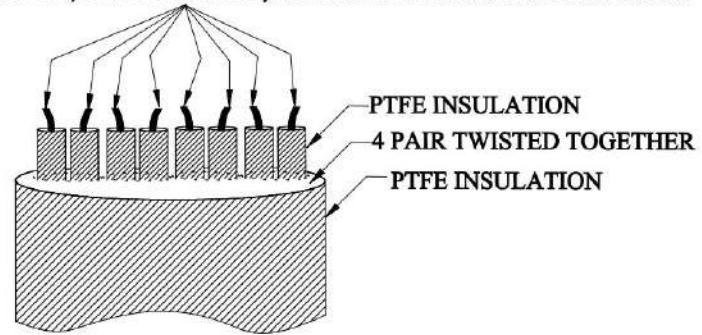

CAT-5 UTP CABLE  
UNSHIELDED TWISTED PAIR