


GENERAL SPECIFICATION SHEET

HDPE-PVC**UP TO 105 DEG C**

Cold-resistant

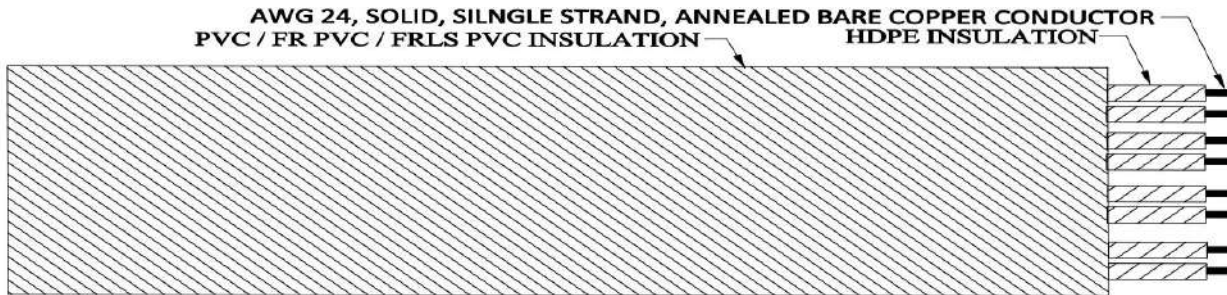

Single halogen-free cable



Temperature-resistant

Technical Detail


Design Standard	: As per IS 584.3 ; IS 8130:84
Conductor	: Annealed Bare Copper Conductor
Conductor Size	: AWG 24
Conductor Type	: Solid wire
No of Pair	: 4 Pair
Core Insulation	: HDPE Insulation
Core Formation	: Twisted
Outer Sheath Insulation	: Extruded PVC / FR PVC / FRLS PVC
Core Colour	: As per Standard
Outer Sheath Colour	: As per Standard
Colour Code	: As per Standard.
Cable Temp. Range	: Up to 105 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 105°C
Excellent Physical Properties
Excellent Di-Electric constant
Excellent Flame Retardant Property
Good Heat Resistivity
High Thermal Endurance
Good Moisture, Chemical Abrasion Resistance
Excellent Resist to Electro Magnetic Inter Ferece

TECHNICAL (GA) DRAWING

AWG 24, SOLID, SINGLE STRAND, ANNEALED BARE COPPER CONDUCTOR

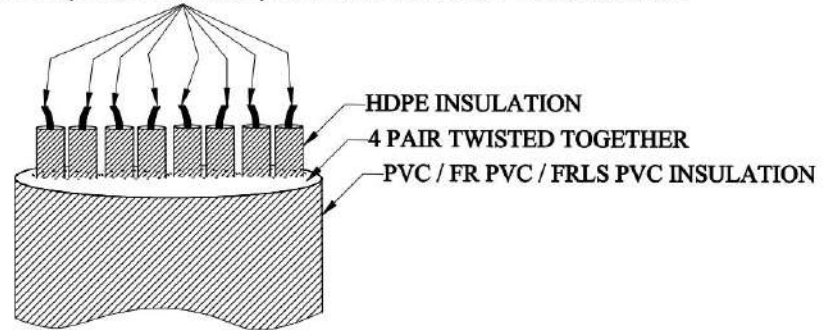

CAT-5 UTP CABLE
UNSHIELDED TWISTED PAIR