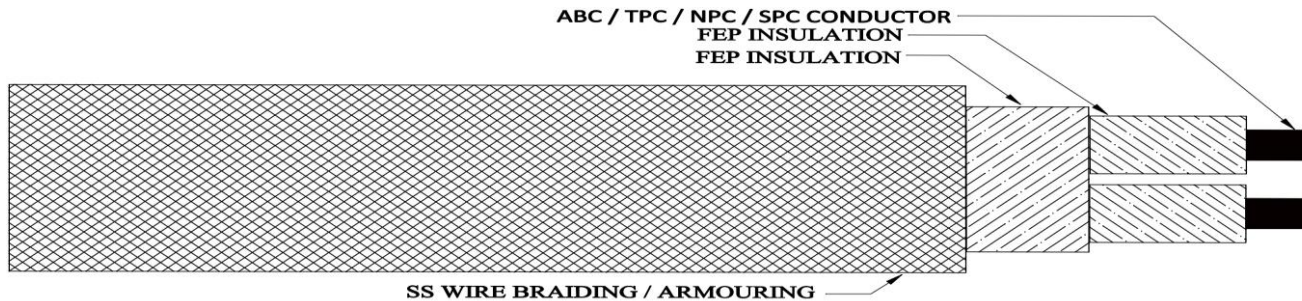


GENERAL SPECIFICATION SHEET

FEP-FEP-S.S. BRAIDING

UP TO 200 DEG C**Cold-resistant****Single halogen-free cable****Temperature-resistant**

Technical Detail


Design Standard	: As per JSS 51034, IS 8130
Conductor	: Annealed Bare Copper / Nickel Plated Copper / Tinned Plated Copper / Silver Plated Copper
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Core	: Single Core / Multi Core
Core Insulation	: Extruded FEP Insulated
Core Formation	: Twisted
Inner Sheath Insulation	: Extruded FEP Insulated
Overall Armouring	: Stainless Steel Wire Braiding / Armouring
Core Colour	: As per Customer specification.
Outer Sheath Colour	: As per Customer specification.
Cable Temp. Range	: Up to 200 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 200°C
Suitable for High Voltage Use
Low Dielectric Constant
Excellent Fire Retardant Property
Good Mechanical Strength
Good Moisture, Chemical Abrasion Resistance
Excellent Mechanical Strength

TECHNICAL (GA) DRAWING

ABC / TPC / NPC / SPC CONDUCTOR

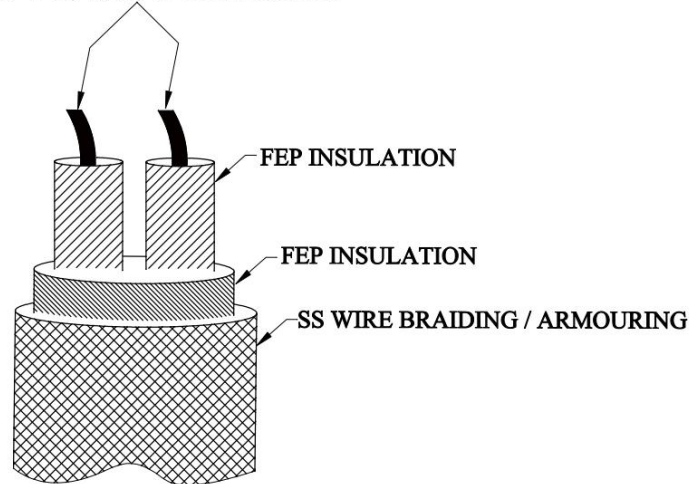

INSTRUMENTATION CABLE