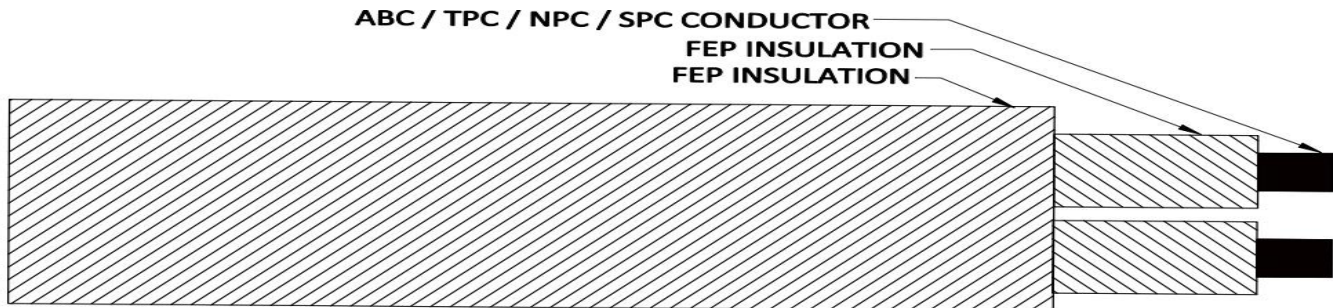


GENERAL SPECIFICATION SHEET

FEP-FEP
UP TO 200 DEG C

Cold-resistant

Single halogen-free cable

Temperature-resistant

Technical Detail


Design Standard	: As per JSS 51034, IS 8130
Conductor	: Annealed Bare Copper / Nickel Plated Copper / Tinned Plated Copper / Silver Plated Copper
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Core	: Single Core / Multi Core
Core Insulation	: Extruded FEP Insulated
Core Formation	: Twisted / Flat
Outer Sheath Insulation	: Extruded FEP Insulated
Core Colour	: As per Customer specification.
Outer Sheath Colour	: As per Customer specification.
Cable Temp. Range	: Up to 200 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 200°C
 Suitable for High Voltage Use
 Low Dielectric Constant
 Excellent Fire Retardant Property
 Good Mechanical Strength
 Good Moisture, Chemical Abrasion Resistance

TECHNICAL (GA) DRAWING

ABC / TPC / NPC / SPC CONDUCTOR

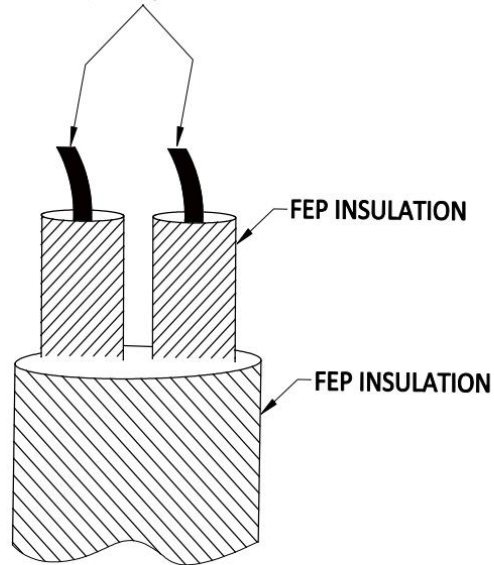**HIGH TEMPERATURE CABLE**