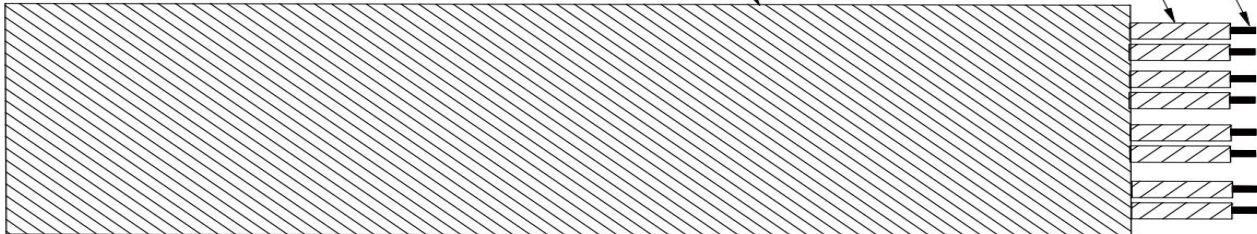


GENERAL SPECIFICATION SHEET

PTFE-PTFE**UP TO 260 DEG C**

AWG 23, SOLID, SINGLE STRAND, ANNEALED BARE COPPER CONDUCTOR
PTFE INSULATION PTFE INSULATION


**Cold-resistant****Single halogen-free cable****Temperature-resistant**

Technical Detail

Design Standard	: As per JSS 51034, IS 8130
Conductor	: Annealed Bare Copper
Conductor Size	: AWG 23
Conductor Type	: Solid wire
No of Pair	: 4 Pair
Core Insulation	: Wrapped & Sintered PTFE (Teflon) Insulation
Core Formation	: Twisted
Outer Sheath Insulation	: Wrapped & Sintered PTFE (Teflon) Insulation
Core Colour	: As per Standard
Outer Sheath Colour	: As per Standard
Cable Temp. Range	: Up to 260 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 260°C
Excellent Heat Resistant
Outstanding Insulating Properties
Good Thermal Stability
Flame Retardant
Excellent Mechanical Strength
Passes JSS 51034 Flame Test

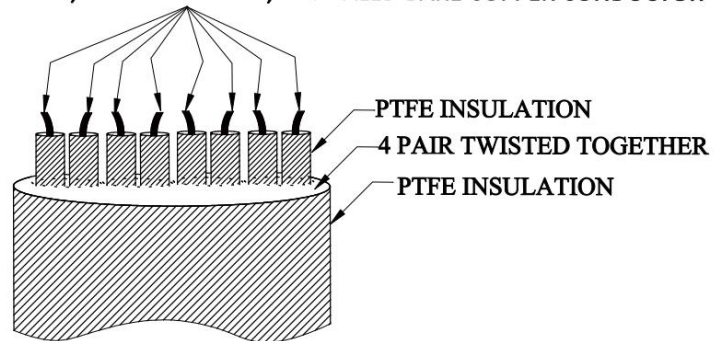TECHNICAL (GA) DRAWING**AWG 23, SOLID, SINGLE STRAND, ANNEALED BARE COPPER CONDUCTOR****CAT-6 UTP CABLE
UNSHIELDED TWISTED PAIR**