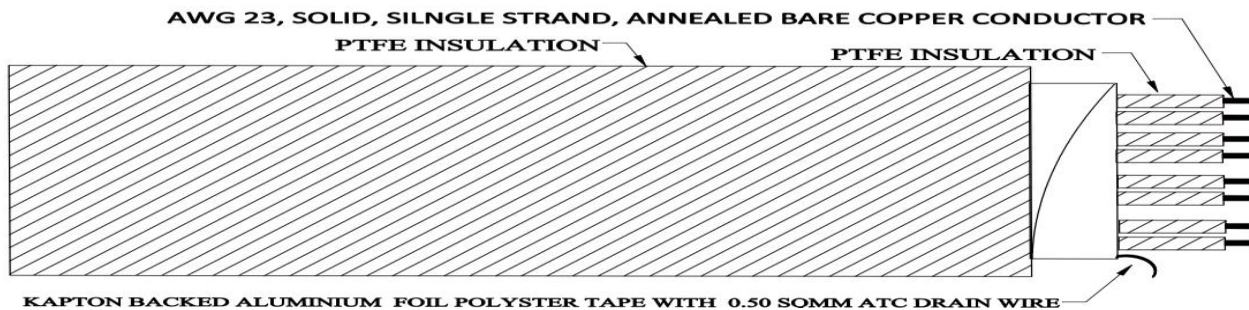


GENERAL SPECIFICATION SHEET

PTFE-ALMYLER-PTFE
UP TO 260 DEG C

Cold-resistant

Single halogen-free cable

Temperature-resistant

Technical Detail

Design Standard	: As per JSS 51034, IS 8130
Conductor	: Annealed Bare Copper
Conductor Size	: AWG 23
Conductor Type	: Solid wire
No of Pair	: 4 Pair
Core Insulation	: Wrapped & Sintered PTFE (Teflon) Insulation
Core Formation	: Twisted
Shielding	: Kapton Backed Aluminium Shielding with (0.50 Sqmm) ATC Drain Wire
Outer Sheath Insulation	: Wrapped & Sintered PTFE (Teflon) Insulation
Core Colour	: As per Standard
Outer Sheath Colour	: As per Standard
Cable Temp. Range	: Up to 260 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 260°C
 Excellent Heat Resistant
 Outstanding Insulating Properties
 Good Thermal Stability
 Flame Retardant
 Excellent Mechanical Strength
 Passes JSS 51034 Flame Test

TECHNICAL (GA) DRAWING

