


GENERAL SPECIFICATION SHEET

PE-FOIL-AL ALLOY BRAIDING-PVC

UP TO 105 DEG C

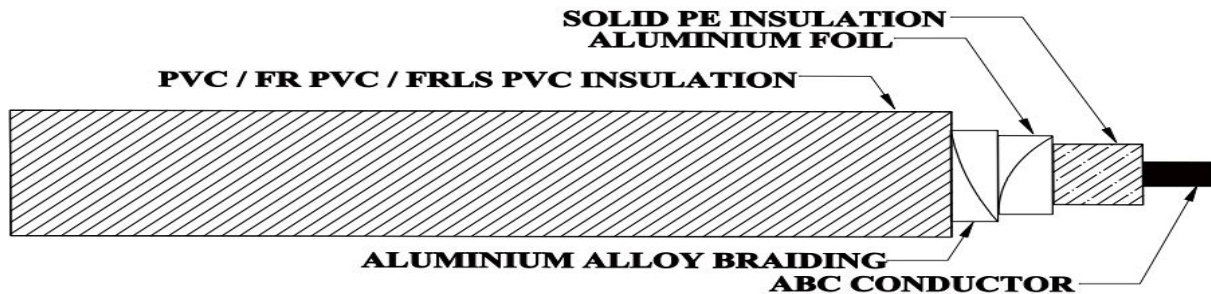

Cold-resistant



Single halogen-free cable




Temperature-resistant

Technical Detail

Design Standard	: As per IS 8130, IS 694 ; IS 5831:84
Conductor	: Annealed Bare Copper Conductor
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Core	: Single Core
Core Insulation	: Extruded Solid PE Insulation
Binder	: Aluminium Foil Tapping
Braiding	: Aluminium Alloy Braiding
Outer Shaeth Insulation	: PVC / FR PVC / FRLS PVC Insulation
Core Colour	: As per Customer specification.
Outer Sheath Colour	: As per Customer specification.
Cable Temp. Range	: Up to Upto 105 Deg.C.
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 260°C
 Excellent Physical Properties
 Excellent Di-Electric constant
 Excellent Flame Retardant Property
 Good Heat Resistivity
 High Thermal Endurance
 Good Moisture, Chemical Abrasion Resistance

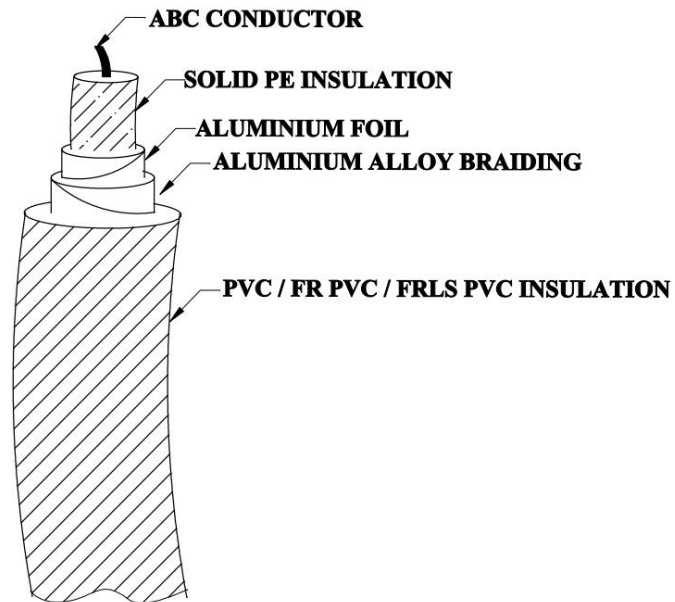TECHNICAL (GA) DRAWING**RG 59/U CABLE**