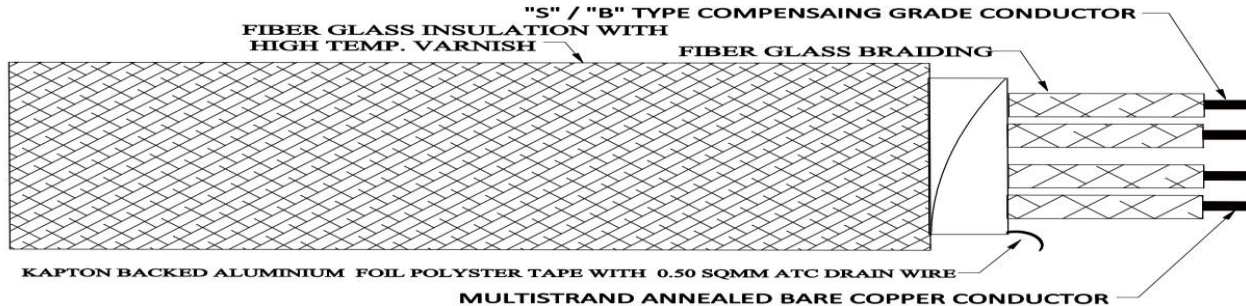


GENERAL SPECIFICATION SHEET

FG-ALMYLER-VFG
UP TO 450 DEG C

Cold-resistant

Single halogen-free cable

Temperature-resistant

Technical Detail

Design Standard	: As per JSS 51037; IS 8130:84
Conductor-1	: "S"/"B" Type Compensating Grade Conductor
Conductor-2	: Annealed Bare Copper Grade Conductor
Conductor Size	: As per Customer Requirement
Conductor Type	: Solid wire / Stranded
No of Pair	: 2 Pair
Core Insulation	: Fiber Glass Braiding
Core Formation	: Twisted
Shielding	: Kapton Backed Al-myler Shielding with (0.50 sqmm) ATC Drain Wire
Overall Braiding	: Fiber Glass Insulation With High Temp. Varnish
Core Colour	: As per Standard
Outer Sheath Colour	: As per Standard
Colour Code	: As per Standard.
Cable Temp. Range	: Up to 450 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 450°C
 Excellent Physical Properties
 Excellent Di-Electric constant
 Excellent Flame Retardant Property
 Good Heat Resistivity
 High Thermal Endurance
 Good Moisture, Chemical Abrasion Resistance
 Excellent Resist to Electro Magnetic Inter Ference

TECHNICAL (GA) DRAWING

