


GENERAL SPECIFICATION SHEET

SILICON RUBBER-VFG-VFG

UP TO 400 DEG C

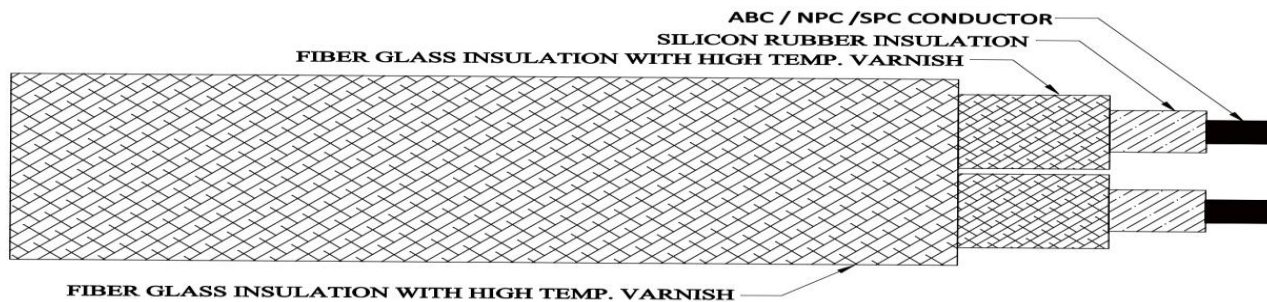

Cold-resistant



Single halogen-free cable



Temperature-resistant

Technical Detail


Design Standard	: As per IS 9968, IS 8130
Conductor	: Annealed Bare Copper / Tinned Plated Copper / Nickel Plated Copper / Silver Plated Copper
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Core	: Single Core / Multi Core
Core Insulation (A)	: Silicon Rubber Insulation
Core Insulation (B)	: Fiber Glass Insulation With High Temp.Varnish
Core Formation	: Twisted
Outer Sheath Insulation	: Fiber Glass Insulation With High Temp.Varnish
Core Colour	: As per Customer specification.
Outer Sheath Colour	: As per Customer specification.
Cable Temp. Range	: Up to 400 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 400°C
 Excellent Heat Resistant
 Outstanding Insulating Properties
 Good Thermal Stability
 Excellent Resistance to Ozone & Corona Effect
 Easier Solder Termination
 Good Moisture, Chemical Abrasion Resistance

TECHNICAL (GA) DRAWING

ABC / NPC / SPC CONDUCTOR

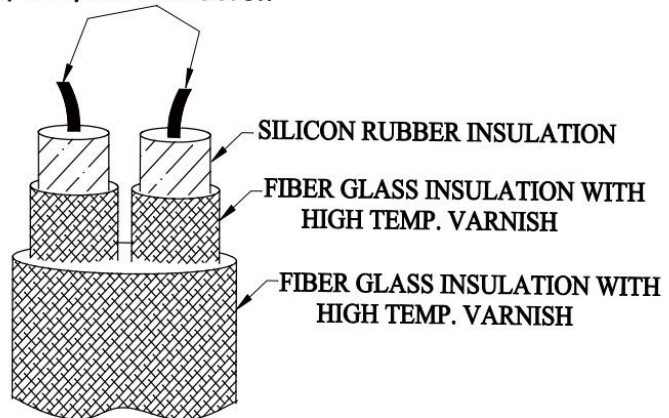**HEAT RESISTANCE CABLE**