


GENERAL SPECIFICATION SHEET

PTFE-VFG-FG-SS BRAIDING

UP TO 450 DEG C

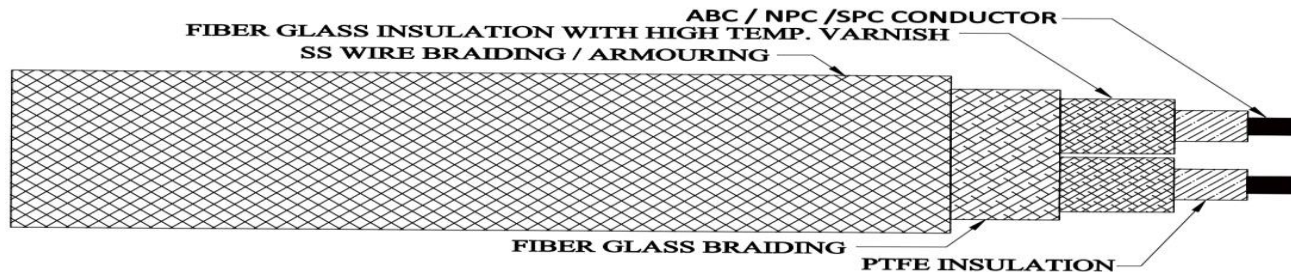

Cold-resistant



Single halogen-free cable




Temperature-resistant

Technical Detail

Design Standard	: As per JSS 51034, IS 8130
Conductor	: Annealed Bare Copper / Nickel Plated Copper / Silver Plated Copper
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Core	: Single Core / Multi Core
Core Insulation (A)	: Wrapped & Sintered PTFE(Teflon) Insulation
Core Insulation (B)	: Fiber Glass Insulation with High Temp.Varnish
Core Formation	: Twisted / Flat
Overall Braiding	: Fiber Glass Braiding
Overall Armouring	: Stainless Steel Wire Braiding
Core Colour	: As per Customer specification.
Outer Sheath Colour	: As per Customer specification.
Cable Temp. Range	: Up to 450 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 450°C
 Excellent Heat Resistant
 Outstanding Insulating Properties
 Good Thermal Stability
 Flame Retardant
 Good Abrasion Resistance
 Good Dielectric Strength
 Excellent Mechanical Strength
 Passes JSS 51034 Flame Test

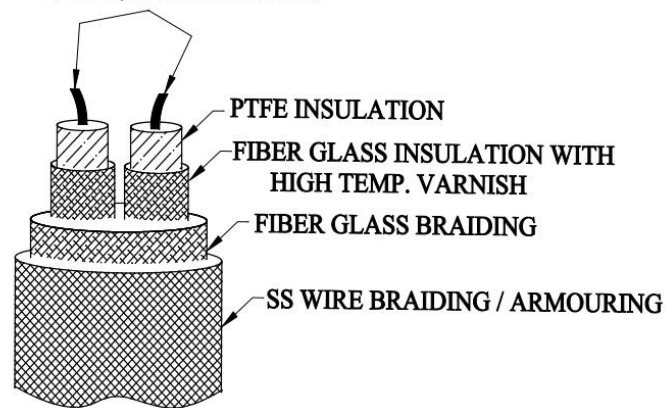TECHNICAL (GA) DRAWING**ABC / NPC /SPC CONDUCTOR****HEAT RESISTANCE CABLE**