


GENERAL SPECIFICATION SHEET

MICA-VFG-FG-SS BRAIDING

UP TO 550 DEG C

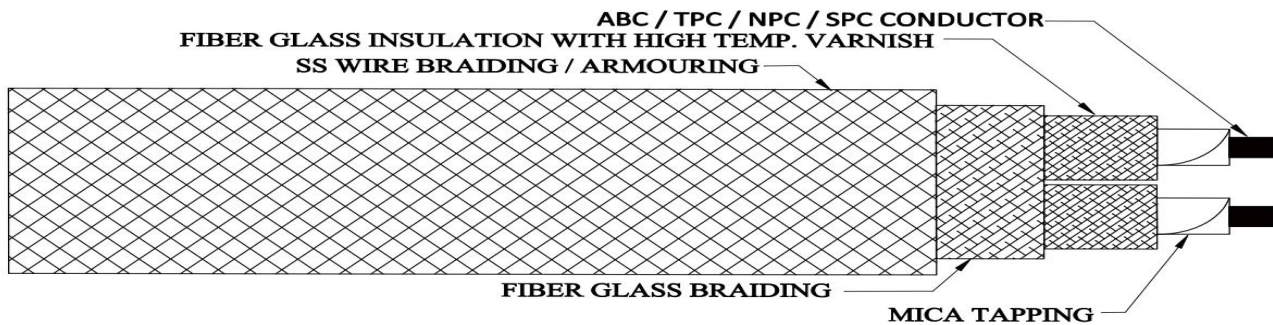

Cold-resistant



Single halogen-free cable



Temperature-resistant

Technical Detail


Design Standard	: As per JSS 51037, IS 8130
Conductor	: Annealed Bare Copper / Tinned Plated Copper / Nickel Plated Copper / Silver Plated Copper
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Core	: Single Core / Multi Core
Core Insulation (A)	: Mica Tapping
Core Insulation (B)	: Fiber Glass Insulation With High Temp. Varnish
Core Formation	: Twisted / Flat
Outer Sheath Insulation	: Fiber Glass Braiding
Overall Armouring	: Stainless Steel Wire Braided / Armouring
Core Colour	: As per Customer specification.
Outer Sheath Colour	: As per Customer specification.
Cable Temp. Range	: Up to 550 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 550°C
 Excellent Physical Properties
 Excellent Di-Electric Constant
 High Thermal Endurance
 Excellent Heat Resistant
 Good Thermal Stability
 Flame Retardant
 Good Moisture, Chemical Abrasion Resistance

TECHNICAL (GA) DRAWING

ABC / TPC / NPC / SPC CONDUCTOR

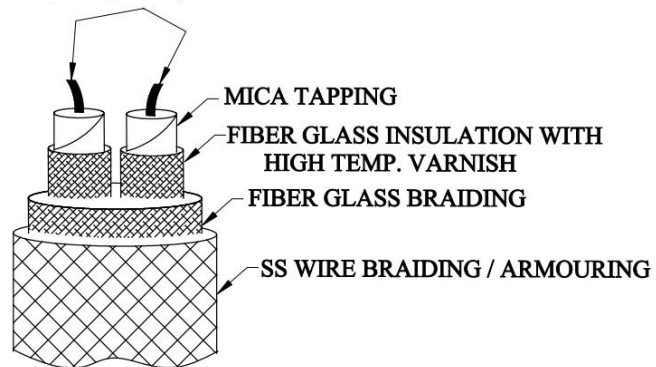**HIGH TEMPERATURE CABLE**