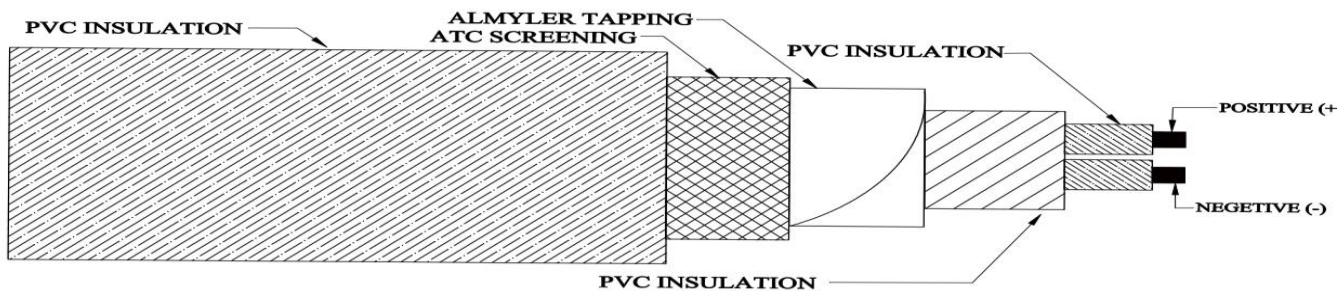


GENERAL SPECIFICATION SHEET

PVC-PVC-ALMYLER-SCREENING-NEOPRENE RUBBER UP TO 105 DEG C


Cold-resistant

Single halogen-free cable

Temperature-resistant

Technical Detail

Design Standard	: As per ANSI MC 96.1, IEC 60584.3, ASTM E230; IS 5831:84; IS 3975:67; IS 1554; BS 5308
Conductor	: KCA/KCB/KX/EX/NX/TX/JX/SC/RC
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Pair	: Single pair / Multi Pair
Core Insulation	: Extruded PVC / HR PVC / FR PVC / FRLS PVC / PE / XLPE / LSZH PVC etc
Core Formation	: Twisted
Inner Sheath Insulation	: Extruded PVC / HR PVC / FR PVC / FRLS PVC / PE / XLPE / LSZH PVC etc
Screening (A)	: Overall Polyester Backed Al-Myler Screening
Screening (B)	: Copper Wire Screening
Outer Sheath Insulation	: Neoprene Rubber Insulation
Core Colour	: As per Customer specification.
Inner Sheath Colour	: Black
Outer Sheath Colour	: As per Customer specification.
Colour Code	: As per Customer specification.
Cable Temp. Range	: Up to 105 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 105°C
 Excellent Physical Properties
 Excellent Di-Electric constant
 Excellent Flame Retardant Property
 Good Heat Resistivity
 High Thermal Endurance
 Good Moisture, Chemical Abrasion Resistance
 Excellent Resist to Electro Magnetic Inter Ference

TECHNICAL (GA) DRAWING

