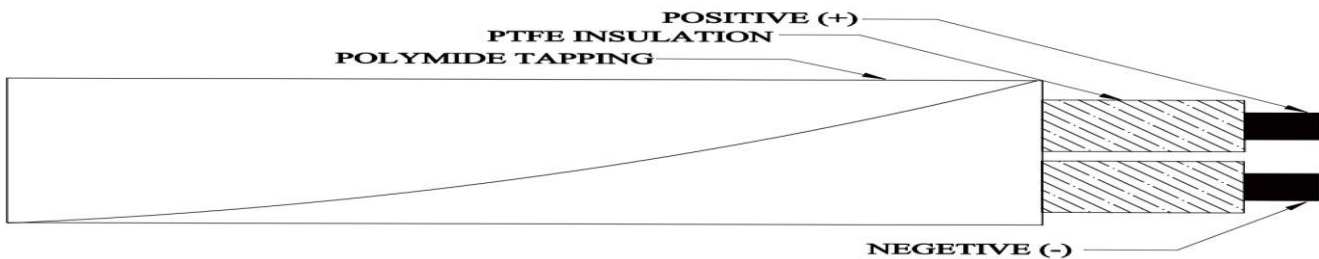


GENERAL SPECIFICATION SHEET

PTFE – POLYIMIDE**UP TO 260 DEG C****Cold-resistant****Single halogen-free cable****Temperature-resistant**


Technical Detail

Design Standard	: As per JSS 51038, ANSI MC 96.1, IEC 60584.3, ASTM E230
Conductor	: KCA/KCB/KX/EX/NX/TX/JX/SC/RC
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Pair	: Single pair / Multi Pair
Core Insulation	: Wrapped & Sintered PTFE(Teflon) Insulation
Core Formation	: Twisted / Flat
Outer Sheath Insulation	: Polymide Tape
Core Colour	: As per Customer specification.
Colour Code	: As per Customer specification.
Cable Temp. Range	: Up to 260 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 260°C
Excellent Heat Resistant
Outstanding Insulating Properties
Good Thermal Stability
Flame Retardant
Passes JSS 51034 Flame Test

TECHNICAL (GA) DRAWING

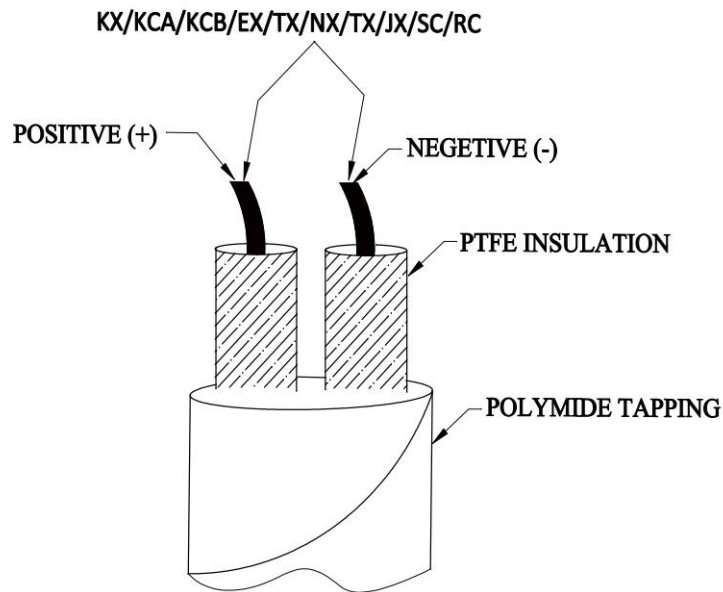

THERMOCOUPLE HIGH TEMPERATURE CABLE