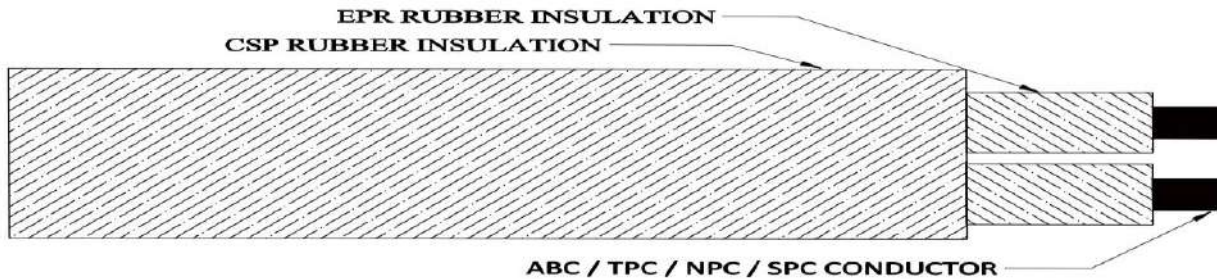


## GENERAL SPECIFICATION SHEET

**EPR-CSP**
**UP TO 90 DEG C**

**Cold-resistant**

**Single halogen-free cable**

**Temperature-resistant**

### Technical Detail


<b>Design Standard</b>	: As per IS 8130, IS 9968, IS 6380
<b>Conductor</b>	: Annealed Bare Copper / Nickel Plated Copper / Tinned Plated Copper / Silver Plated Copper
<b>Conductor Size</b>	: Variant as per customer specifications
<b>Conductor Type</b>	: Solid wire / Flexible
<b>No of Core</b>	: Single Core / Multi Core
<b>Core Insulation</b>	: EPR Insulation
<b>Core Formation</b>	: Twisted / Flat
<b>Outer Sheath Insulation</b>	: CSP Insulation
<b>Core Colour</b>	: As per Customer specification.
<b>Outer Sheath Colour</b>	: As per Customer specification..
<b>Cable Temp. Range</b>	: Up to 90 Deg C
<b>Voltage Grade</b>	: Upto 1100 V

### Special Features

Max. Temp. upto 90°C  
Excellent Heat Resistant  
Outstanding Insulating Properties  
Good Thermal Stability  
Excellent Resistance to Ozone & Corona Effect  
Easier Solder Termination  
Good Moisture, Chemical Abrasion Resistance

**TECHNICAL ( GA ) DRAWING**

ABC / TPC / NPC / SPC CONDUCTOR

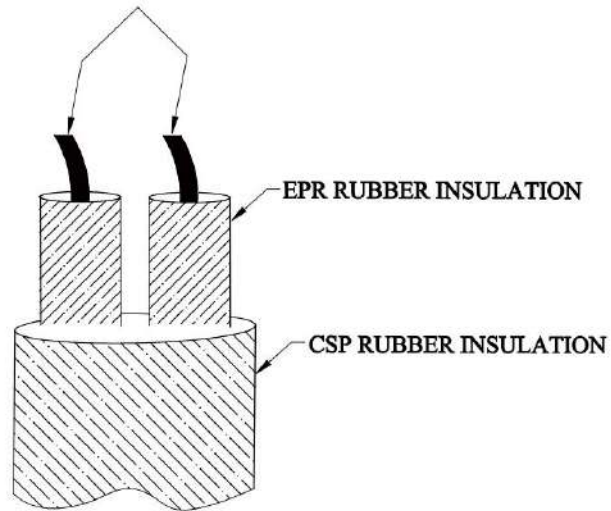**TUFF RUBBER CABLE**