

GENERAL SPECIFICATION SHEET

SILICON RUBBER – SILICON RUBBER

UP TO 200 DEG C



Cold-resistant



Single halogen-free cable



Temperature-resistant

Technical Detail


Design Standard	: As per IS 9968, IS 8130
Conductor	: Annealed Bare Copper / Tinned Plated Copper / Nickel Plated Copper / Silver Plated Copper
Conductor Size	: Variant as per customer specifications
Conductor Type	: Solid wire / Flexible
No of Core	: Single Core / Multi Core
Core Insulation	: Silicon Rubber Insulation
Core Formation	: Twisted
Outer Sheath Insulation	: Silicon Rubber Insulation
Core Colour	: As per Customer specification.
Outer Sheath Colour	: As per Customer specification.
Cable Temp. Range	: Up to 200 Deg C
Voltage Grade	: Upto 1100 V

Special Features

Max. Temp. upto 200°C
 Excellent Heat Resistant
 Outstanding Insulating Properties
 Good Thermal Stability
 Excellent Resistance to Ozone & Corona Effect
 Easier Solder Termination
 Good Moisture, Chemical Abrasion Resistance

TECHNICAL (GA) DRAWING

ABC / TPC / NPC / SPC CONDUCTOR

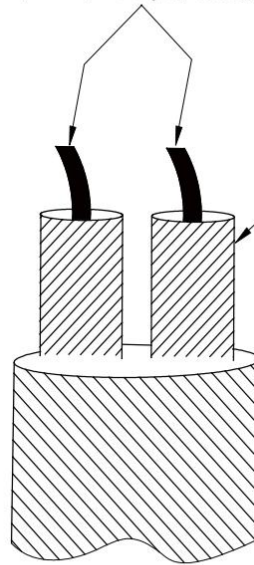

SILICON RUBBER INSULATION

SILICON RUBBER INSULATION

HEAT RESISTANCE CABLE